Architectural Door Accessories

ASSA ABLOY

Pemko Commercial Threshold

The global leader in door opening solutions

Applies to the following products:

184_T, 184_P

Installation Instructions:

1. Carefully trim to fit within the stops of frame opening.
2. Trim seal 1/16" longer than trimmed stop at each end.
3. Position against door to assure proper seal (not too tight).
4. Fasten to threshold with #10 x 3/4" flat head self tapping machine screws.

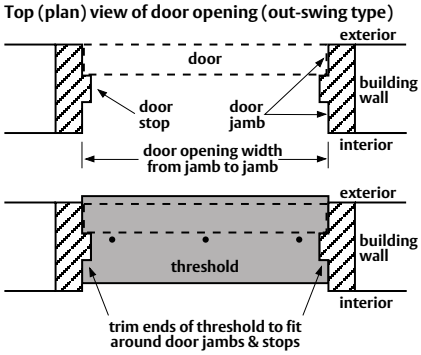

Tools Required:



Testing/Ratings:

Gasketing material for fire doors intended for aplication to listed steel frames and/or classified steel covered composite type, and hollow metal type fire doors rated up to 3 hours; wood and plastic covered composite type fire doors rated up to 1-1/2 hours; and wood core type fire doors rated up to 20 minutes.
(Thresholds may or may not contain gasketing material).

10C

CLASSIFIED C UL US 4L10

www.pemko.com

MEMPHIS, TN USA
P: 800 824-3018
F: 800 243-3656

VENTURA, CA USA
P: 800 283-9988
F: 800 283-4050

VANCOUVER, BC CA
P: 877 535-7888
F: 877 535-7444

TORONTO, ON CA
P: 877 535-7888
F: 877 535-7444

Copyright © 2017 Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Company is prohibited.